

3500 BTU/H Indoor Slimline Air Conditioner *DTS SL*

Series

Type 12, Side Mounting



Description

- Narrow design for side mounting on any enclosure surface where hot spot or low capacity cooling is required.
- Closed loop cooling ensures clean enclosure air is recirculated without ever mixing with contaminated ambient air.

Standards


- Maintains NEMA 12 rating
- IP 54
- UL, cUL and CE

Features


- R134a refrigerant.
- Thermostat control accessible from inside enclosure.
- Expansion valve increases efficiency with improved evaporator heat transfer and less frequent compressor operation.
- Built in condensor/evaporator
- Continuous air circulation from high capacity fans.
- EMI/RFI suppression meets CE.
- Self-diagnostics on startup.
- Fault indication via LED light.
- Door contact for power down when enclosure door is opened.
- Gasket, mounting kit and template for cutout and drilling are included.
- Condensate drain hose and clamp
- Q Mount allows unit to hang in place for easy installation.

Accessories

- Gasket Kits
- Filter Kits
- Condensate Bottle
- Remote Door Switches
- Water Condensate Evaporator

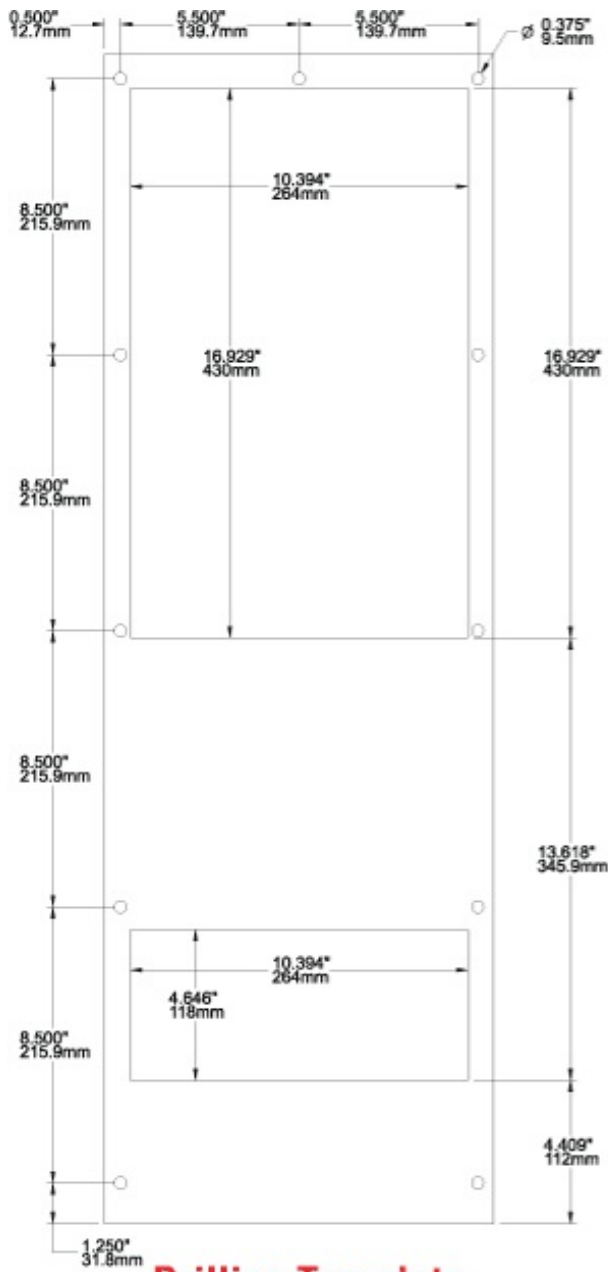

Drilling Template

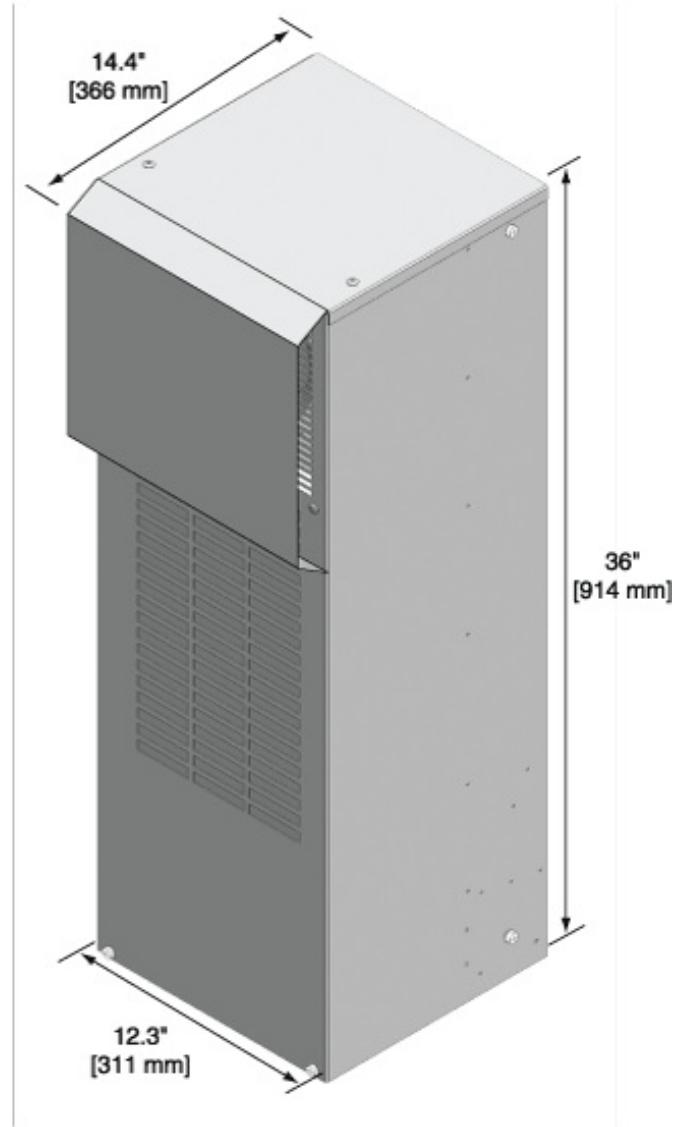

Part No.	Ship Wt. lbs
DTS3141SLA115LG	113
DTS3141SLA230LG	113

Part No.	Ship Wt. lbs
DTS3141SLA115LG	113
DTS3141SLA230LG	113

Electrical Data	DTS3141SLA115LG	DTS3141SLA230LG
Rated Voltage	115 V 60 Hz	230 V 50/60 Hz
Range of Operation	103 -127 V	198-252 V
Power Consumption	917 W	890 W
Running Amps	8.5 A	4.0 A
Starting Current	28 A	14.8 A
Line Cord	Terminal Block	Terminal Block

Data subject to change without notice

