

**Ratings**  
 Voltage: 300 V  
 Temperature: 80 °C


**Conductor**  
 Gauge: 26 AWG  
 Material: tinned copper strands  
 Strand size: Ø 0.16 mm  
 Strand count: 7

**Insulator**  
 Material: PVC, 80 °C  
 Color: black, white, red  
 Nominal thickness: 0.23 mm  
 Outer diameter: 1.10 mm

**Outer jacket**  
 Material: PVC, 80 °C  
 Color: white  
 Thickness: 0.76 mm  
 Diameter: 4.0 ±0.15 mm  
 Durometer: 91 Shore A

**Wire marking:** E339579 AWM STYLE 2464 26AWG 80°C 300V VW-1 --- C AWM I A 80°C 300V FT1 LF TENSILITY HLE

**Tests**  
 Voltage test: 300 V  
 Spark test: 3.0 kV  
 Max resistance at 20 °C: 150 ohm/km  
 Insulation tensile strength: 2.11 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113 ±2 °C for 7 days:  
 Minimum tensile strength 70 % original  
 Minimum elongation 65 % original  
 Heat shock: 121 ±1 °C /1 hour, no observed degradation  
 Deformation: 121 ±1 °C /1 hour, ≤ 50 %  
 Cold bend: -10 ±1 °C /1 hour, no observed cracking  
 Flammability: VW-1  
 Dielectric test: 2000 V ac for 1 minute without breakdown

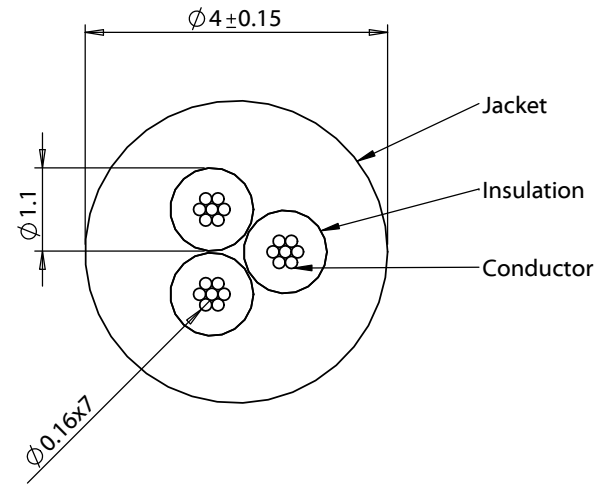

REVISION	DATE	DESCRIPTION
A	06/25/2014	Initial release

PREPARED:  
 VERIFIED:  
 DIMENSIONS ARE IN MILLIMETERS  
 TOLERANCES:  
 X: ± 0.5 mm  
 X.X: ± 0.3 mm  
 X.XX: ± 0.05 mm

NOTES:  
 RoHS and REACH compliant  
 Electrical test: no open, no short circuit, no intermittent  
 DESCRIPTION:  
 Wire, 3C TS, 26 AWG, UL2464, 300V, 80C, 4.0 mm, VW-1, PVC, 91A, white

**TENSILITY**  
 20802 Sockeye Place #130  
 Bend, OR 97701 USA  
 tel 541.323.3228 fax 541.323.4202  
 800 877.670.7118 www.tensility.com

SIZE A	PART NUMBER <b>30-00378</b>
SCALE: 10:1	WEIGHT:
SHEET 1 OF 1	