
NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 MAXIMUM INPUT POWER: 5 WATTS AVG. AT +40°C DERATED LINEARLY TO 0.5 WATTS AT +125°C
- 1.3 OPERATING TEMP. RANGE: -55°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 MAXIMUM VSWR: 1.05 + 0.01f(GHz)
- 2.0 MARKING: MARK UNIT AS SHOWN. (REF.: INK-01526-27-03)
- 3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.



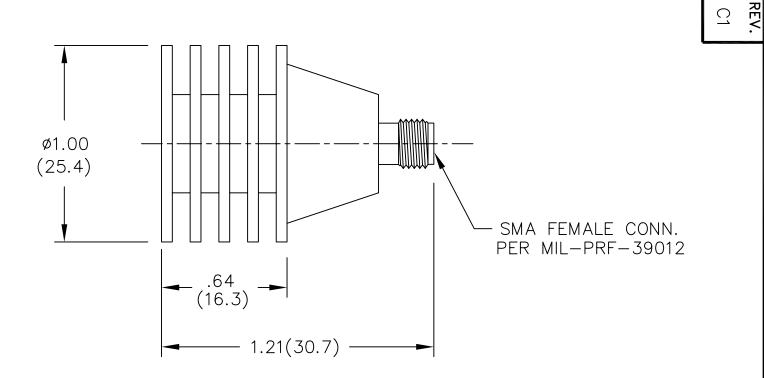

DWG. NO. WAS: 01974-01-00

TRM-2010-FO-SMA-

07

NUMBER

REV.	DESCRIPTION	DATE
1	RELEASED	4/4/74
A	ECR 6545	7/27/79
В	REDRAW ON CAD	3/18/92
0	ECN 15506	9/23/96
C1	ADDED TITLEBLOCK	10/26/05

UNLESS OTHERWISE NOTED DIMENSIONS	34078	MIDW	EST	MIC	RO	WA	V	\overline{E}
ARE IN INCHES AND TOLERANCES ARE:	NOTICE: The	information	TITLE					
3 PLACE DECIMALS ±.005	drawing is	proprietary	TERMINATION					
2 PLACE DECIMALS ±.02	and must n without the							
FRACTIONS ±1/64	of Midwest							
PARALLELITY: T.I.R								
FLATNESS: T.I.R.	DRAWN/DATE A.BEATTY 3/17/92	ENG./DATE G.KOZAK 3/25/92	DRAWING NU TRM-20	mber 10-F0-S	MA-07			
CONCENTRICITY: T.I.R	CHECKED/DATE	APPROVED/DATE						
ANGLES AND PERPENDICULARITY: ±1°			SCALE: 2	2=1	SHEET	1	of	1