


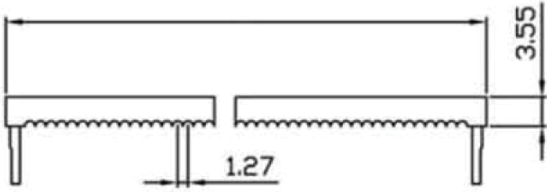


A



B


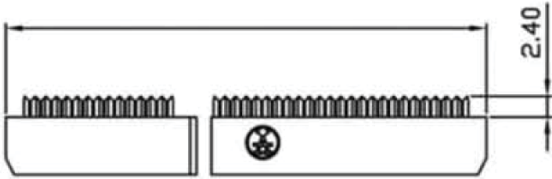


C

Materials:

- Insulator: P.B.T. 30% Glass Fiber, UL94V-0
- Contact Material: Phosphor Bronze
- Underplate: Nickel
- Contact Area: Gold Flash Selective
- Operating Temperature: -55°C~+105°C

D

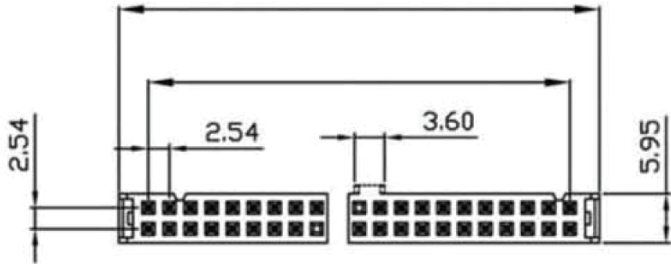**Electrical:**

- Current Rating: 1 Amp
- Insulation Resistance: 1,000M Ω Min.
- Dielectric Withstanding: 500V AC

E

F

Unit of Measure: MM \pm 0.1

G

H



Scale	1:1						Name
TOLERANCE						Drawn	10.19.11
X.X	\pm 0.40					Approved	
X.XX	\pm 0.25						
X.XXX	\pm 0.15						
Angle	\pm 3°						
				Modification	Date	Name	

Item No.		AWP64-7240-T-R
Title		
IDC-Socket - 64 Contact w/o Strain Relief Pitch 2.54 x 2.54MM, Central Guide Lug		
Drawing No.		rev00
Replace		
		Sheet

1

2

3

4

5

6

7