THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECO–16–015236	24OCT2016	RS	DR

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
1/0 AWG SOLID OR STRANDED	N/A	N/A

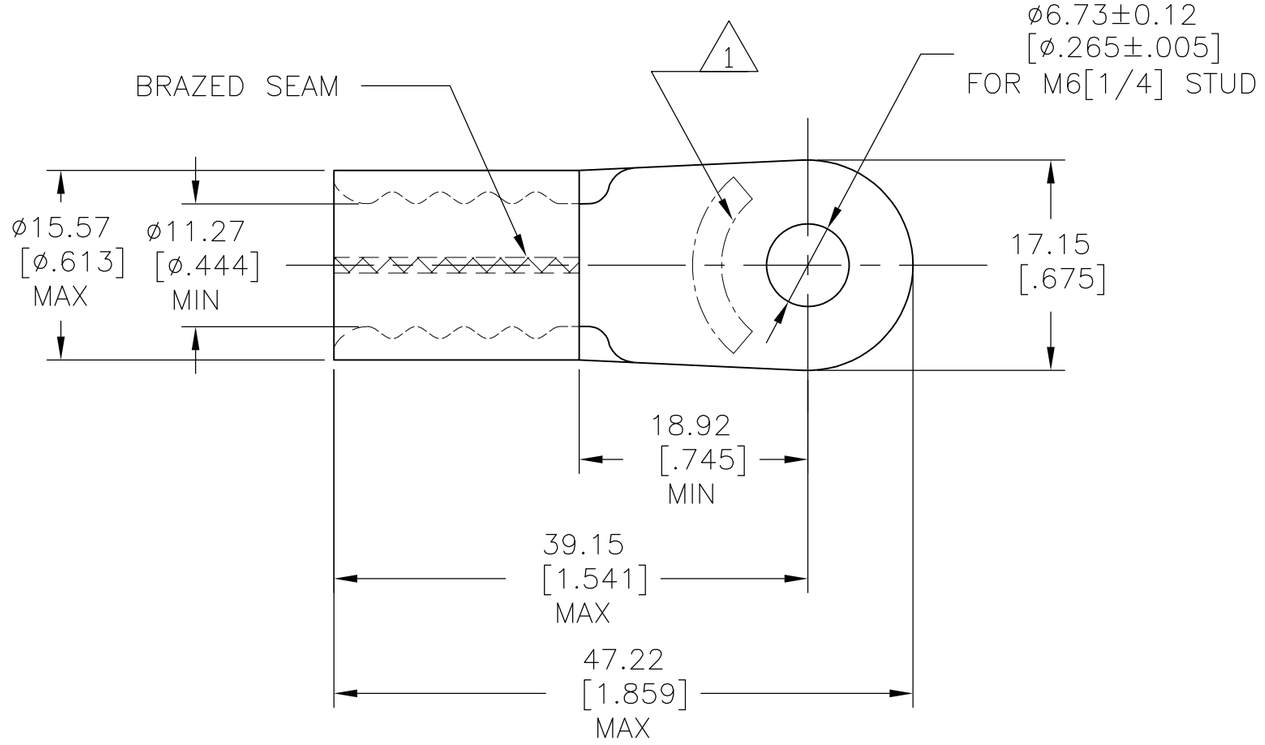

1 STAMP AMP 1/0W*, APPROX AS SHOWN.

2 MATERIAL THK IS 1.778±.076 [.070±.003].

3 COPPER PER ASTM B–152, ANNEALED.

4 NICKEL PL. 0.00762 [.000300] MIN THK PER SAE AMS QQ–N–290.

5 NOTE DELETED.

QTY	PACKAGE TYPE	PART NO.
50	LOOSE PIECE	696904–1

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1–800–522–6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1–800–722–1111
FOR ORDER ENTRY	1–800–526–5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

MAX RECOMMENDED OPERATING TEMPERATURE: 343°C[649°F] MAX

VOLTAGE RATING: N/A

CIRCULAR MIL AREA: 42.2–60.6mm² [83,700–119,500] SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± .008
4 PLC	± –
ANGLES	± –

MATERIAL 3

FINISH 4

DWN	JR RUTH	07NOV05
CHK	MJ SPICER	07NOV05
APVD	MJ SPICER	07NOV05
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT		

TE Connectivity

NAME: TERMINAL, RING TONGUE, HEAT RESISTANT, STRATO–THERM
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–696904	—

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV A1

1470–19 (1/15)