


# EDZ960/X

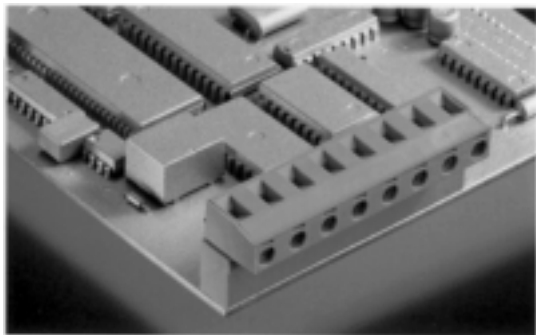

2-16 poles, Spacing 7.62 mm

insert required no. of poles **X**

How to order see page 5

\*factory wiring



## Ratings:

Rated Voltage	300V	400 V
Rated Current	15 A	12 A (T60)
Wire Size	AWG* 28-12	2.5 mm <sup>2</sup>
Test Voltage		6 kV/3
Rated Torque/ScrewSize		0.5 Nm/M3

## Max. Rated Cross Section

Single Wire (solid)	2.5 mm <sup>2</sup>
Stranded Wire (flexible)	2.5 mm <sup>2</sup>
Stranded wire with Ferrules	2.5 mm <sup>2</sup>

## Dimensions

Spacing	7.62 mm
Stripped Length	6.0 mm

## Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn

## Color

Green

