


	plating	part no.
b	GOLD FLASH over NICKEL	132A10029X
	30µin HARD GOLD over min. 50µin NICKEL	132C10029X
	50µin HARD GOLD over min. 50µin NICKEL	132J10029X

STRIPPING DIMENSION

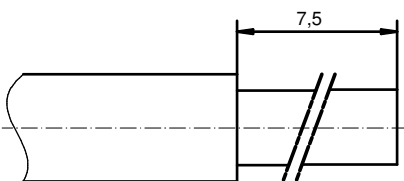

Directive 2002/95/EC RoHS compliant

pos	qty	description	material	plating
3	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
2	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL
1	1	FRONT SIDE	COPPER ALLOY	SEE TABLE

partlist				
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	1 x b	Ä4820	02.07.2013	K.H.
	a	Original		
	rev.	description	date	name
	CONEC ®			
	part no: see table			
tolerance	ISO 2768-m	dim. in mm	scale: 5:1	
drawn	23.03.98	Barcinski	material: see partlist	
appd.	23.03.98	Mickenbecker	title: HIGH POWER CONTACT FEMALE SOLDER CUP 20A D-SUB COMBINATION	
norm			dwg no: 13K11E4A	
d-old			DIN-A3 sh: 1	