


**Extended length is with 500g of force**

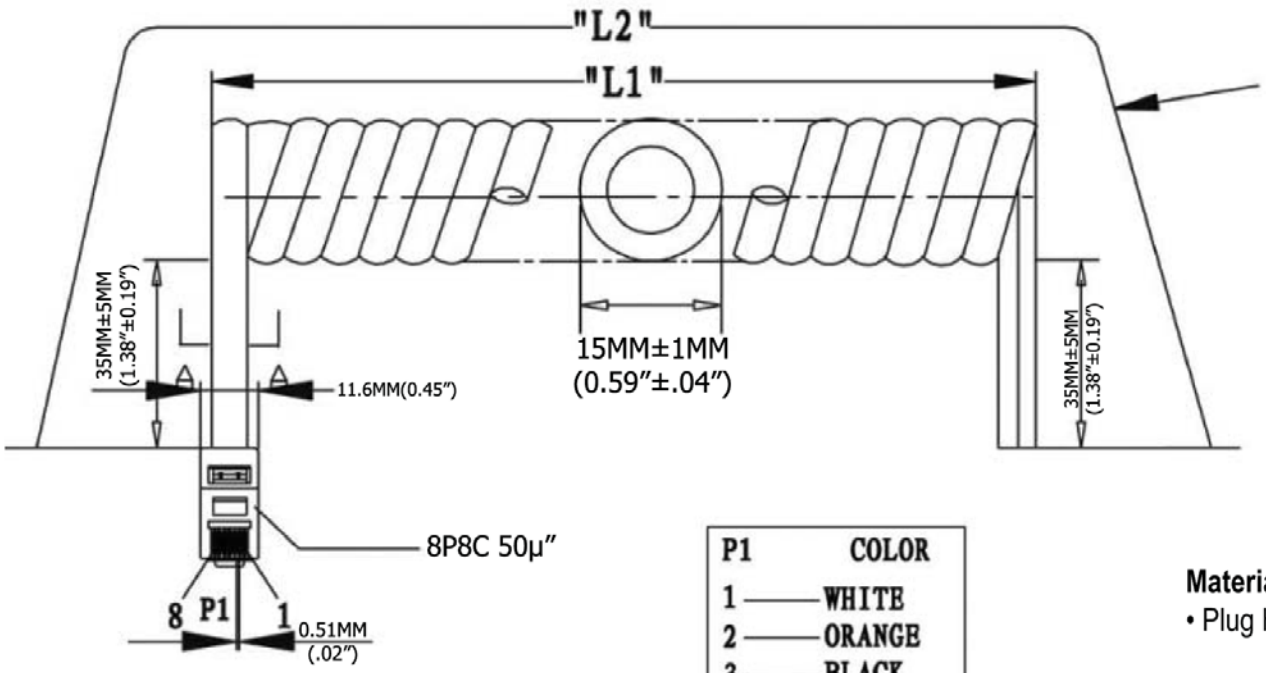


SEC: A-A

| P1 | COLOR |
|---|---|
| 1 | WHITE |
| 2 | ORANGE |
| 3 | BLACK |
| 4 | RED |
| 5 | GREEN |
| 6 | YELLOW |
| 7 | BLUE |
| 8 | BROWN |

| Extended Length ("L2") | Typical Retracted Length ("L1") |
|---|---|
| 300.0 Inches - 345.0 Inches | 126.0 Inches |
| 7,620.0MM-8,763.0MM | 3,200.4MM |

**Material:**

- Plug Housing : Polycarbonate, clear
  Plug Terminal: 0.36" [0.14MM] Thick Phosphor Bronze
- Connector: 50" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µ[.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
  Insulation(X43): PP6331 ID 0.95-1.0
  Jacket: PVC NOUL 80P
  Package: Individual PE Bag

**Electrical:**

- Voltage rating: 30V (DC)

RoHS Complaint

| | |
|---|---|
| Scale | 1:1 |
| TOLERANCE | |
| X.X | ±0.40 |
| X.XX | ±0.25 |
| X.XXX | ±0.15 |
| Angle | ±3° |

| Modification | Date | Name |
|---|---|---|
| | | |

| | | Name |
|---|---|---|
| Drawn | 11.21.11 | Chappell |
| Approved | | |

ASSMANN WSW components

**Item No.** AT-C-26-8/8/S-25-OE

**Title** NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Single Plug, 50µ" of contact plating, Silver

Drawing No. rev00

Replace | Sheet