

1

2

3


4

5

6



7

A

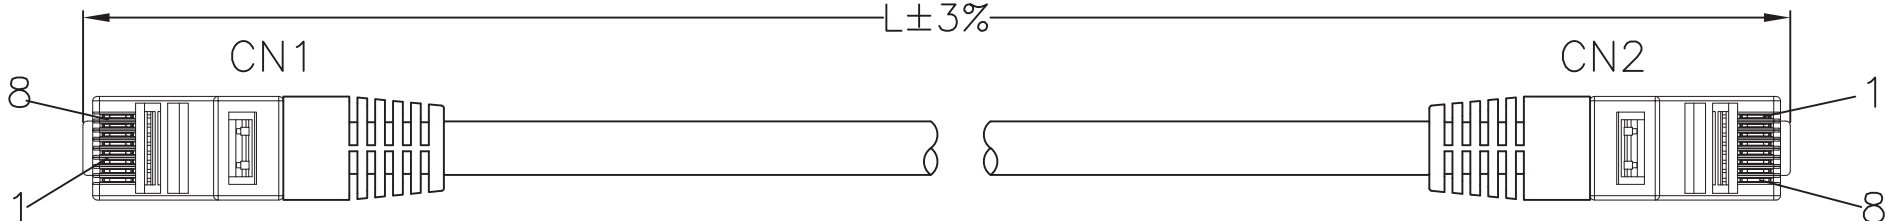




A

B

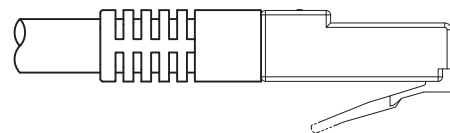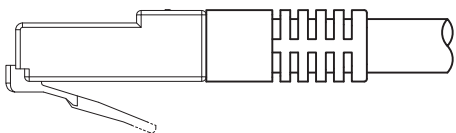

B

C

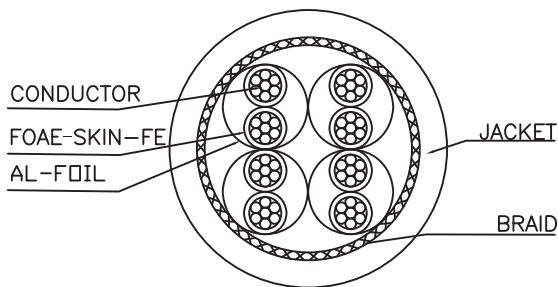

C


D

PIN OUT

| CN1 | WIRE COLOR | CN2 |
|-------|------------|-------|
| 1 | WHITE | 1 |
| 2 | ORANGE | 2 |
| 3 | WHITE | 3 |
| 6 | GREEN | 6 |
| 4 | BLUE | 4 |
| 5 | WHITE | 5 |
| 7 | WHITE | 7 |
| 8 | BROWN | 8 |
| SHELL | BRAID | SHELL |

D

E

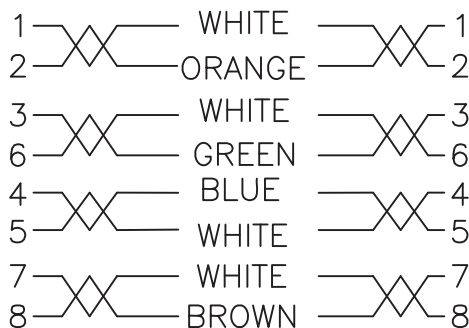

E

F

Material

- Cable: SSTP (26AWG*1PR+A)*4+B+PVC - OD:5.8±0.2mm
- RJ45 Connector: 8P8C, Two fork gold plated contacts 50μ" with metal housing
- Molding PVC: 45P
- Cable/Molding color: Grey

Electrical

- Open/short/intermittence: 100%

Order Code: A-MCSSP60xxx-R

Order lengths in meter: 0.5, 1, 2, 3, 5, 7, 10, 15, 20, 30

F

G

Unit: mm



| Scale | | | | | | Date | Name | Title |
|-----------|-----|-----|--------------|----------|--------|--|--------|--|
| TOLERANCE | | | | | | Drawn | Wilson | Cat6 SSTP Patch cable Shielded, 26AWG, Grey |
| X. | ±X | | | | | Approved | Groll | ASSMANN WSW-No. A-MCSSP60xxx-R |
| X.X | ±X | | | | | | | Drawing-No. |
| X.XX | ±X | | | | | | | |
| DIM | TOL | | | | | | | |
| X.° | ±X° | | | | | | | |
| X.X° | ±X° | ① | Update | 19.02.13 | Wilson | | | rev01 |
| Angle | TOL | Id. | Modification | Date | Name | | | Sheet |
| | | | | | | <small>1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us</small> | | 1/1 |

G

H

H

1

2

3

4

5

6

7