
THREE FLANGE DUAL PRIMARY 56VA PC BOARD POWER TRANSFORMER A. Electrical Specifications (@ 25°C) REV. Status 1. Maximum Power: 56VA REVISION -07/28/08 MP 2. Primary Voltage and Frequency: 115/230VAC 50/60Hz 3. Secondary RMS Rating: REVISION A UPDATED SAFETY 09/29/11 MP (7-9); 9.3VAC @ 4.0A LOAD. (10-12); 27.5VAC CT @ 0.68A LOAD. REVISION B ADD FUSE INFO 01/18/12 MP 4. Voltage Regulation: 17% TYP @ full load to no load 5. Temperature Rise(normal op. cond.): 63°C TYP (75°C MAX) REVISION C SAFETY NOTES ADDED 6. A 10% Input Voltage change will proportionally affect transformer sec voltage. The max. allowed wdg temp under abnormal condition is 155°C 03/20/13 MP Insulation Resistance: 100MΩ MIN @ 500VDC, Pri to Sec, Pri to Core, Sec to Core 8. Dielectric Withstand: 3750Vrms 1 minute @ Pri to Sec 1500Vrms 1 minute @ Pri to Core, Sec to Core B. Marking: includes input and output ratings C. Safety: Conforms to construction requirement of: UL5085-1, -2; CSA No. 66.1, 66.2 (from Datecode 1143 and onwards). UL506, UL1411 UL1446(CLASS 130(B)) EN61558-1, -2-6Safety cerificate file reference: UL File# E138028, E79781, E92957 Date code and CSA File# 175561 country of origin TUV (P.S.) File# 4478013415698 Non short-circuit proof safety isolating transformer. Intended for mounting on PCBs and for building into end use-equipment. Not intended for series/parallel connection with other transformers. D. Mechanical Specifications: 48.5(1.91)MAX $1.14\pm0.127(0.045\pm0.005)$ SQUARE 8 PLACES \rightarrow -4.75(0.187) MIN Clearance holes for 6-40-(M5) MS Ø3.56(0.14) MIN $64.0\pm1.0(2.52\pm0.039)$ 4 Places 0 63.5±0.38 $76.2^{+1.5}_{-0.0}$ (3.0 $^{+0.06}_{-0.0}$) (2.50 ± 0.015) TOLERANCES (mm) 4 ± 0.2 $4 \le 20 \pm 0.3$ $20 \le 50 \pm 0.4$ PREPARED BY: $50.8\pm0.38(2.0\pm0.015)$ -M. PITCHAI NOTE: BOARD WASHING IS NOT RECOMMENDED FOR THESE PARTS. **ENGINEER:** MODEL SPECIFICATION DRAWING CONTROL NO. REV MODEL DESCRIPTION P-A1-13645 **POWER** M. PITCHAI PLT56-32-130B ACAD/MXFMR/A1136451.DWG **TRANSFORMER** CONTENTS OF THIS DRAWING ARE TAMURA CORPORATION OF AMERICA
SUBJECT TO CHANGE WITHOUT 1040 SOUTH ANDREASEN DRIVE #100 FSCONDIDO CA 92020 SAFETY ENGINEER 1040 SOUTH ANDREASEN DRIVE, #100 ESCONDIDO, CA. 92029 (951) 699-1270 FAX 7607400536 B. O'CONNELL DIM: mm[In] SCL: 1/1 APPROVED: PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING. P. BRUNE

REV. Status


REVISION 07/28/08 MP

E. Mounting Footprint:

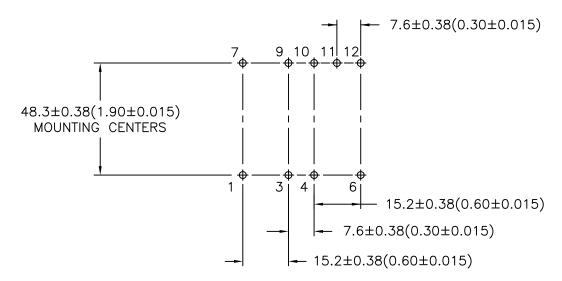


F. Schematic Diagram:

PRIMARY INPUT CONNECTIONS

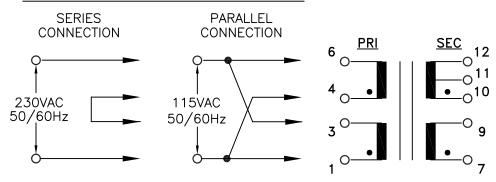

SECONDARY OUTPUT CONNECTIONS

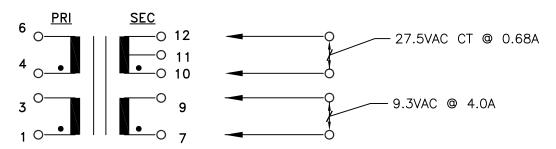

Note:

DRAWING CONTROL NO.

P-A1-13645

Required Secondary Fusing. Winding (7-9): T4.00A Winding (10-12): T0.80A

Fuse accordance with IEC60127-2

PREPARED BY:

ENGINEER:
M. PITCHAI

M. PITCHAI

M. PITCHAI

ACAD\MXFMR\A1136452.DWG | C

SAFETY ENGINEER

B. OCONNELL

PRIOR NOTICE

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

REV MODEL DESCRIPTION
POWER
TRANSFORMER

699-1270

TRANSFORMER PLT5

PLT56-32-130B

DIM: mm[In] SCL: 1/1 SH: 2 0F 2

MODEL SPECIFICATION

APPROVED:

P. BRUNE

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.