


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PART NUMBER | TAB SIZE    | WIRE RANGE<br>AWG | COLOR  | MAX. INSUL.    | DIMENSIONS in.  |               |               |
|-------------|-------------|-------------------|--------|----------------|-----------------|---------------|---------------|
|             |             |                   |        |                | A $\pm .03$     | B $\pm .01$   | C $\pm .01$   |
| DV10-250    | .250 X .032 | 12-10             | YELLOW | .229<br>(5.82) | 1.03<br>(26.16) | .30<br>(7.62) | .13<br>(3.30) |

NOTES:

- UL RECOGNIZED AND CSA CERTIFIED FOR:
  - 600V MAX VOLTAGE RATING
  - 194°F (90°C) MAX TEMP RATING
  - STRANDED COPPER WIRE ONLY
  - 6-12 LBS INITIAL INSERTION/WITHDRAWAL FORCE
- MATERIAL:
  - STAMPING-BRASS, TIN PLATED
  - HOUSING-VINYL
  - SLEEVE-BRASS, TIN PLATED
- DIMENSIONS IN BRACKETS ARE IN mm OR mm<sup>2</sup>
- INSTALLATION TOOLS: UL/CSA: CT-550, CT-1551, CT-1550  
 PANDUIT RECOMMENDED: CT-100, CT-160, CT-260, CT-460
- PACKAGE QTY: -L=50, -D=500
- WIRE STRIP LENGTH: 9/32 <sup>+1/32</sup><sub>-0</sub> (7.1 <sup>+8</sup><sub>-0</sub>)

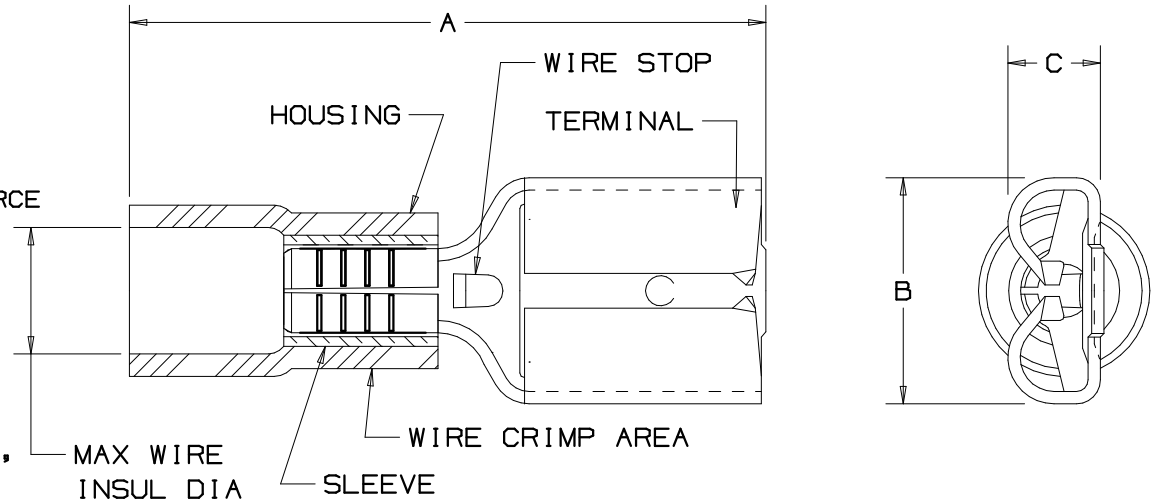

CERTIFIED  
LR31212



RECOGNIZED  
E78522

|     |      |      |     |                                    |       |      |     |
|-----|------|------|-----|------------------------------------|-------|------|-----|
| 06  | 6/06 | DAW  | DAW | REMOVED MAX. AMPERAGE NOTE         |       |      |     |
| 05  | 7/03 | KLFU | SKB | ADDED INTERNAL SERRATIONS          | 12453 | SKB  | TRO |
| 04  | 1/01 | KMD  | SKB | CAD FILE SPEC. WAS N41199AA_PCD_03 | 8938  | JAC  | CCH |
| 03  | 5/99 | JKD  |     | ADDED CT-1551 & CT-1550 TOOLS      | 07642 |      |     |
| 02  | 3/95 | MS   | RLS | UPDATED NOTES AND DIMENSIONS       | 03048 | LA   | JB  |
| REV | DATE | BY   | CHK | DESCRIPTION                        | ECN # | CUST | PM  |

A41199\_06

**PANDUIT** CORP.

TINLEY PARK, ILLINOIS

FEMALE DISCONNECTS, VINYL INSULATED  
.250 X .032

DRAWN BY: FES    CHK'D: RLS    SCALE: NONE    DRAWING NO.: A41199