


# DUAL-IN-LINE HEADERS

## SERIES 160, 162, 163 • SLOTTED, SOLDER TAIL & WRAPOST • OPEN FRAME



- Series 160, 162, and 163 DIL Headers are equipped with slotted heads to accept wires or component leads
- Series 160 terminations are pluggable 0,46 dia. solder tails MM #0282, See page 216 for details. Series 162 and 163 terminations are two or three level wraposts MM #1106. See page 228 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

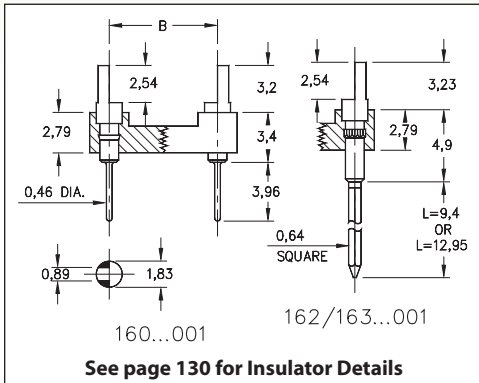

Total number of pins	Pin Pitch			Quantity per tube	ORDERING INFORMATION					
	A	B	C		Solder Tail	L = 9,4 (2 Level Wrapost)	L = 12,95 (3 Level Wrapost)			
10	12,6	5,08	7,6	41	160-XX-210-00-001000	162-XX-210-00-001000	163-XX-210-00-001000			
4	5,0	7,62	10,1	102	160-XX-304-00-001000	162-XX-304-00-001000	163-XX-304-00-001000			
6	7,6	7,62	10,1	67	160-XX-306-00-001000	162-XX-306-00-001000	163-XX-306-00-001000			
8	10,1	7,62	10,1	50	160-XX-308-00-001000	162-XX-308-00-001000	163-XX-308-00-001000			
10	12,6	7,62	10,1	40	160-XX-310-00-001000	162-XX-310-00-001000	163-XX-310-00-001000			
14	17,7	7,62	10,1	28	160-XX-314-00-001000	162-XX-314-00-001000	163-XX-314-00-001000			
16	20,3	7,62	10,1	25	160-XX-316-00-001000	162-XX-316-00-001000	163-XX-316-00-001000			
18	22,8	7,62	10,1	22	160-XX-318-00-001000	162-XX-318-00-001000	163-XX-318-00-001000			
20	25,3	7,62	10,1	20	160-XX-320-00-001000	162-XX-320-00-001000	163-XX-320-00-001000			
22	27,8	7,62	10,1	18	160-XX-322-00-001000	162-XX-322-00-001000	163-XX-322-00-001000			
24	30,4	7,62	10,1	16	160-XX-324-00-001000	162-XX-324-00-001000	163-XX-324-00-001000			
28	35,5	7,62	10,1	14	160-XX-328-00-001000	162-XX-328-00-001000	163-XX-328-00-001000			
20	25,4	10,16	12,7	20	160-XX-420-00-001000	162-XX-420-00-001000	163-XX-420-00-001000			
22	27,8	10,16	12,7	18	160-XX-422-00-001000	162-XX-422-00-001000	163-XX-422-00-001000			
24	30,4	10,16	12,7	16	160-XX-424-00-001000	162-XX-424-00-001000	163-XX-424-00-001000			
28	35,5	10,16	12,7	14	160-XX-428-00-001000	162-XX-428-00-001000	163-XX-428-00-001000			
32	40,6	10,16	12,7	12	160-XX-432-00-001000	162-XX-432-00-001000	163-XX-432-00-001000			
24	30,4	15,24	17,7	16	160-XX-624-00-001000	162-XX-624-00-001000	163-XX-624-00-001000			
28	35,5	15,24	17,7	14	160-XX-628-00-001000	162-XX-628-00-001000	163-XX-628-00-001000			
32	40,6	15,24	17,7	12	160-XX-632-00-001000	162-XX-632-00-001000	163-XX-632-00-001000			
36	45,7	15,24	17,7	11	160-XX-636-00-001000	162-XX-636-00-001000	163-XX-636-00-001000			
40	50,8	15,24	17,7	10	160-XX-640-00-001000	162-XX-640-00-001000	163-XX-640-00-001000			
42	53,3	15,24	17,7	9	160-XX-642-00-001000	162-XX-642-00-001000	163-XX-642-00-001000			
48	60,9	15,24	17,7	8	160-XX-648-00-001000	162-XX-648-00-001000	163-XX-648-00-001000			
50	63,5	15,24	17,7	8	160-XX-650-00-001000	162-XX-650-00-001000	163-XX-650-00-001000			
52	66,0	15,24	17,7	7	160-XX-652-00-001000	162-XX-652-00-001000	163-XX-652-00-001000			
50	63,5	22,86	25,3	8	160-XX-950-00-001000	162-XX-950-00-001000	163-XX-950-00-001000			
52	66,0	22,86	25,3	7	160-XX-952-00-001000	162-XX-952-00-001000	163-XX-952-00-001000			
64	81,2	22,86	25,3	6	160-XX-964-00-001000	162-XX-964-00-001000	163-XX-964-00-001000			
<div style="border: 1px solid black; border-radius: 50%; padding: 5px; display: inline-block;"> <b>XX=Plating Code See to Right</b> </div>					<b>SPECIFY PLATING CODE XX =</b>		10 ◆	90	40 ◆	
					Pin Plating	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn		